

R&R Industrial grade keyboard IKV3-12C – for rough environment -


case	Front panel V4a panel mount design
keys	Patented vandal proof R&R keys Travel 3mm Actuation force 1N or 3N Good tactile feedback Lifetime > 3 million strokes
Keycaps	Sealed contacts and sealed guides Zn diecast V3 18x18mm with Engraved inlays aluminium or stainless steel
layout	12 keys 4 rows grid 23mm 3 columns grid 24mm
Protection class	Front panel I P 6 5 Dustproof, waterproof
Operating temperature	0 – 70°C non condensing
Weight	
applications	code keyboard, access control

IKV3-12C

Ob der Eck 4 · D-78148 Gütenbach · Telefon (07723) 9186-0 · Telefax (07723)9186-30

DNR6678_E.DOC REV. 01

WWW.RURGMBH.DE - WWW.RURSHOP.DE - INFO@RURGMBH.DE

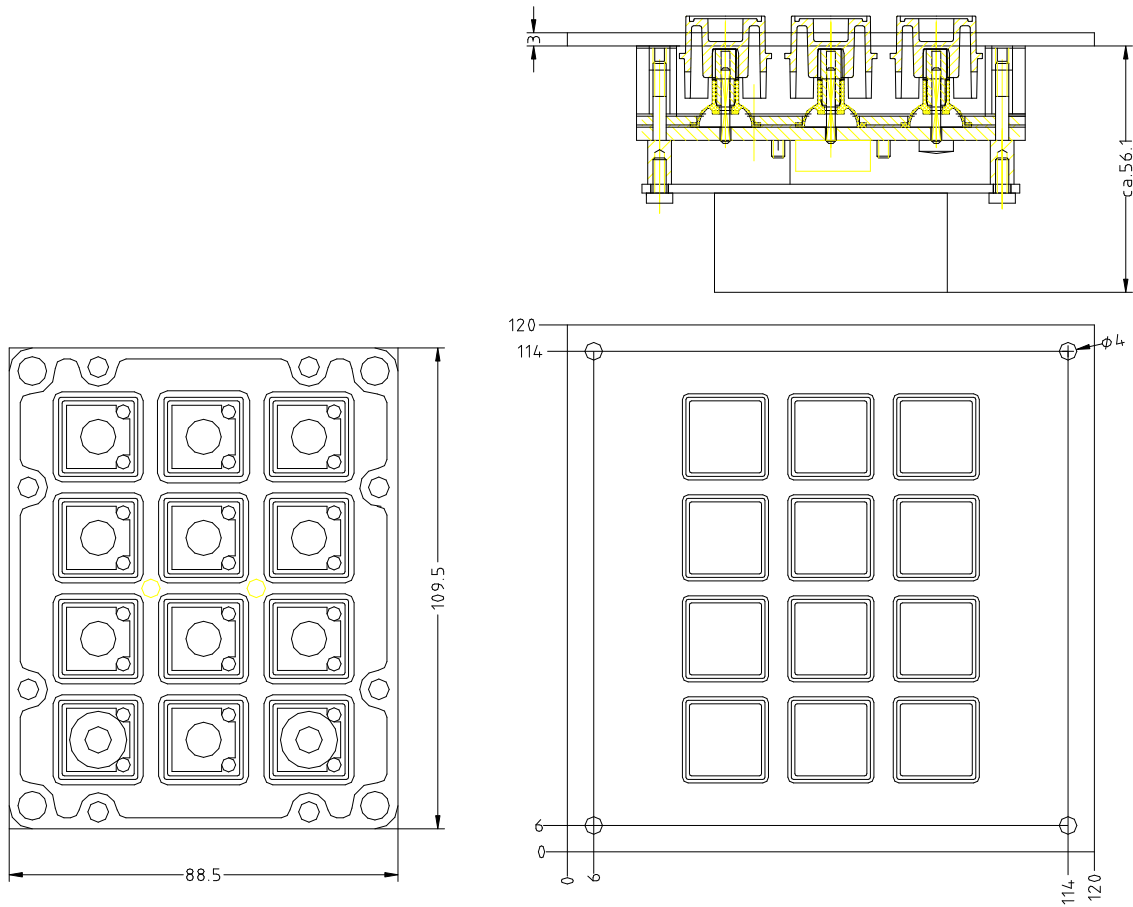

dimensions


(W x H x D) 120 x 120 x approx. 60 mm

IKV3-12C

Ob der Eck 4 · D-78148 Gütenbach · Telefon (07723) 9186-0 · Telefax (07723)9186-30

DNR6678_E.DOC REV. 01

WWW.RURGMBH.DE - WWW.RURSHOP.DE - INFO@RURGMBH.DE

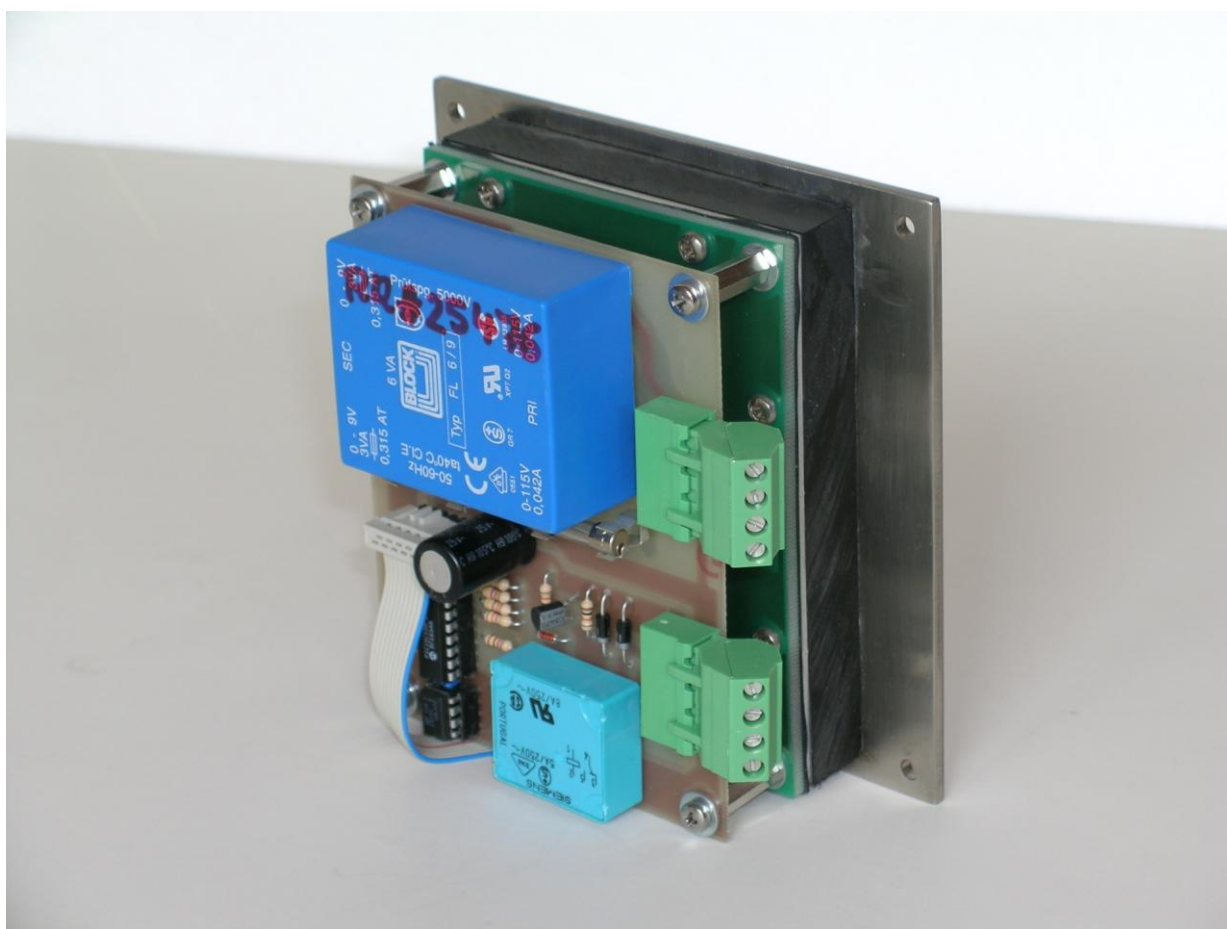

Power supply
interface

230V AC
Relay 1 x changeover
Plug-in Screw terminal

IKV3-12C

Ob der Eck 4 · D-78148 Gütenbach · Telefon (07723) 9186-0 · Telefax (07723)9186-30

DNR6678_E.DOC REV. 01

WWW.RURGMBH.DE - WWW.RURSHOP.DE - INFO@RURGMBH.DE