



R&R Mediaplayer MP001

Gehäuse (housing)

Aluminium eloxiert (aluminium anodized)

Gewicht (weight)

ca. (approx.) 2,8 kg

With DVD-Player

B x H x T

ca. 302 x 101,5 x 220 mm

WxHxD


approx. 11,89 x 4 x 8.66 inch

Zeichnung (drawing)

DNR 16802 (DNR 17401)

Warentarifnummer:

84714900900

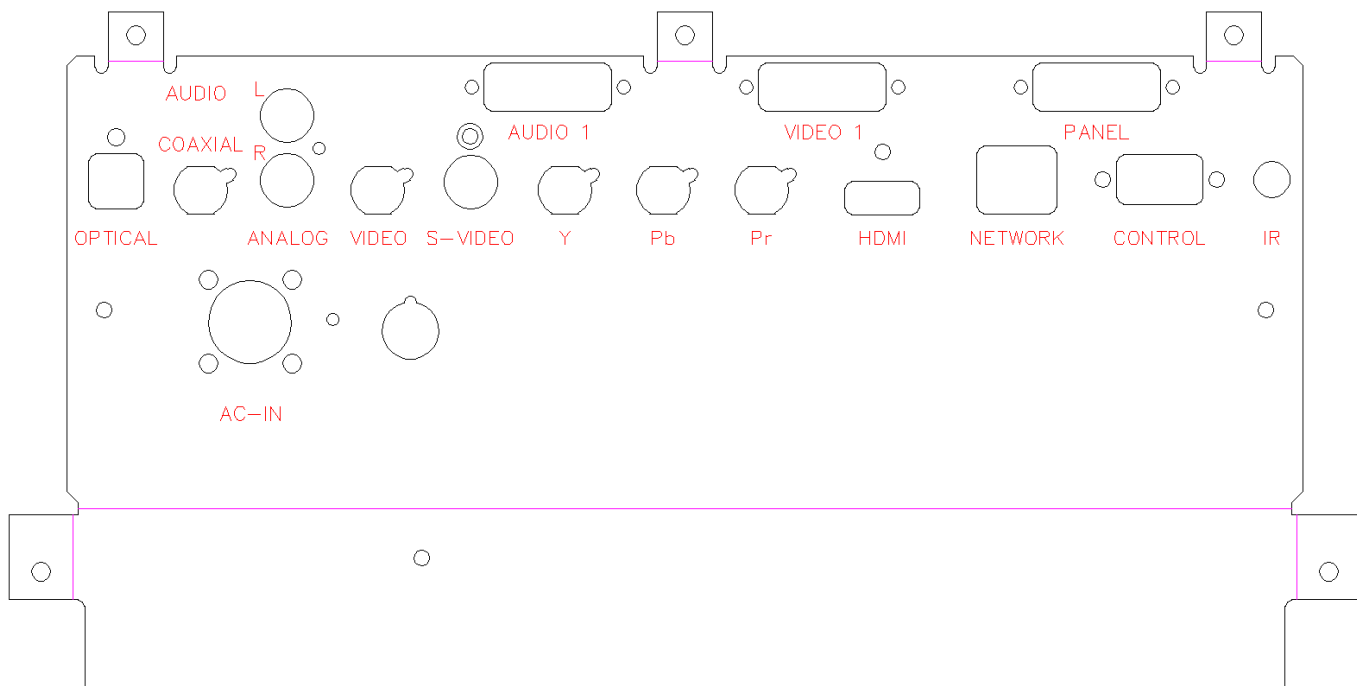

power connector AC-IN		
A	L	
B	N	
C	PE	
Type	Serie 97 3polig Flanschstecker 97-3102A-10SL-3P	
Matching type	Serie 97 3polig Kupplung 97-3106A-10SL-3S	
Power consumption	typical 20 W max. 30W	


voltage selector		
switch position	input voltage range	frequency
115	nom. 115V AC 100 to 120 V AC	47..440Hz
230	nom. 230V AC 200 to 240 V AC	47..440Hz

internal UPS
Hold up time typical = 1 s , Hold up time minimum = 200ms @ nominal input voltage

Audio 1: audio-output sym. (15pol D-sub-male)		
Signal	PIN	Signal
left+	1	
	9	GND
left-	2	
	10	GND
right+	3	
	11	GND
right-	4	
	12	GND
digital-audio+	5	
	13	GND
digital-audio-	6	
	14	GND
nc	7	
	15	GND
nc	8	

Video 1: video-output sym. (15pol D-sub-male)		
Signal	PIN	Signal
Pr+	1	
	9	GND
Pr-	2	
	10	GND
Y+	3	
	11	GND
Y-	4	
	12	GND
Pb+	5	
	13	GND
Pb-	6	
	14	GND
CVBS+	7	
	15	GND
CVBS-	8	

Panel: operator-panel (25pol D-sub-female)		
Signal	PIN	Signal
+5V-out(IR-receiver)	1	
	14	IR-RX-data
IR-TX-data	2	
	15	on/off-button
eject-button	3	
	16	reserve-button
GND	4	
	17	blue-LED-on/off -
yellow-LED-on/off -	5	
	18	blue-LED-eject -
yellow-LED-eject -	6	
	19	blue-reserve-LED -
yellow-reserve-LED -	7	
	20	common-LED +
common-light-bar +	8	
	21	common-light-bar +
yellow-light-bar -	9	
	22	yellow-light-bar -
blue-light-bar -	10	
	23	blue-light-bar -
nc	11	
	24	nc
nc	12	
	25	IR-input
GND	13	

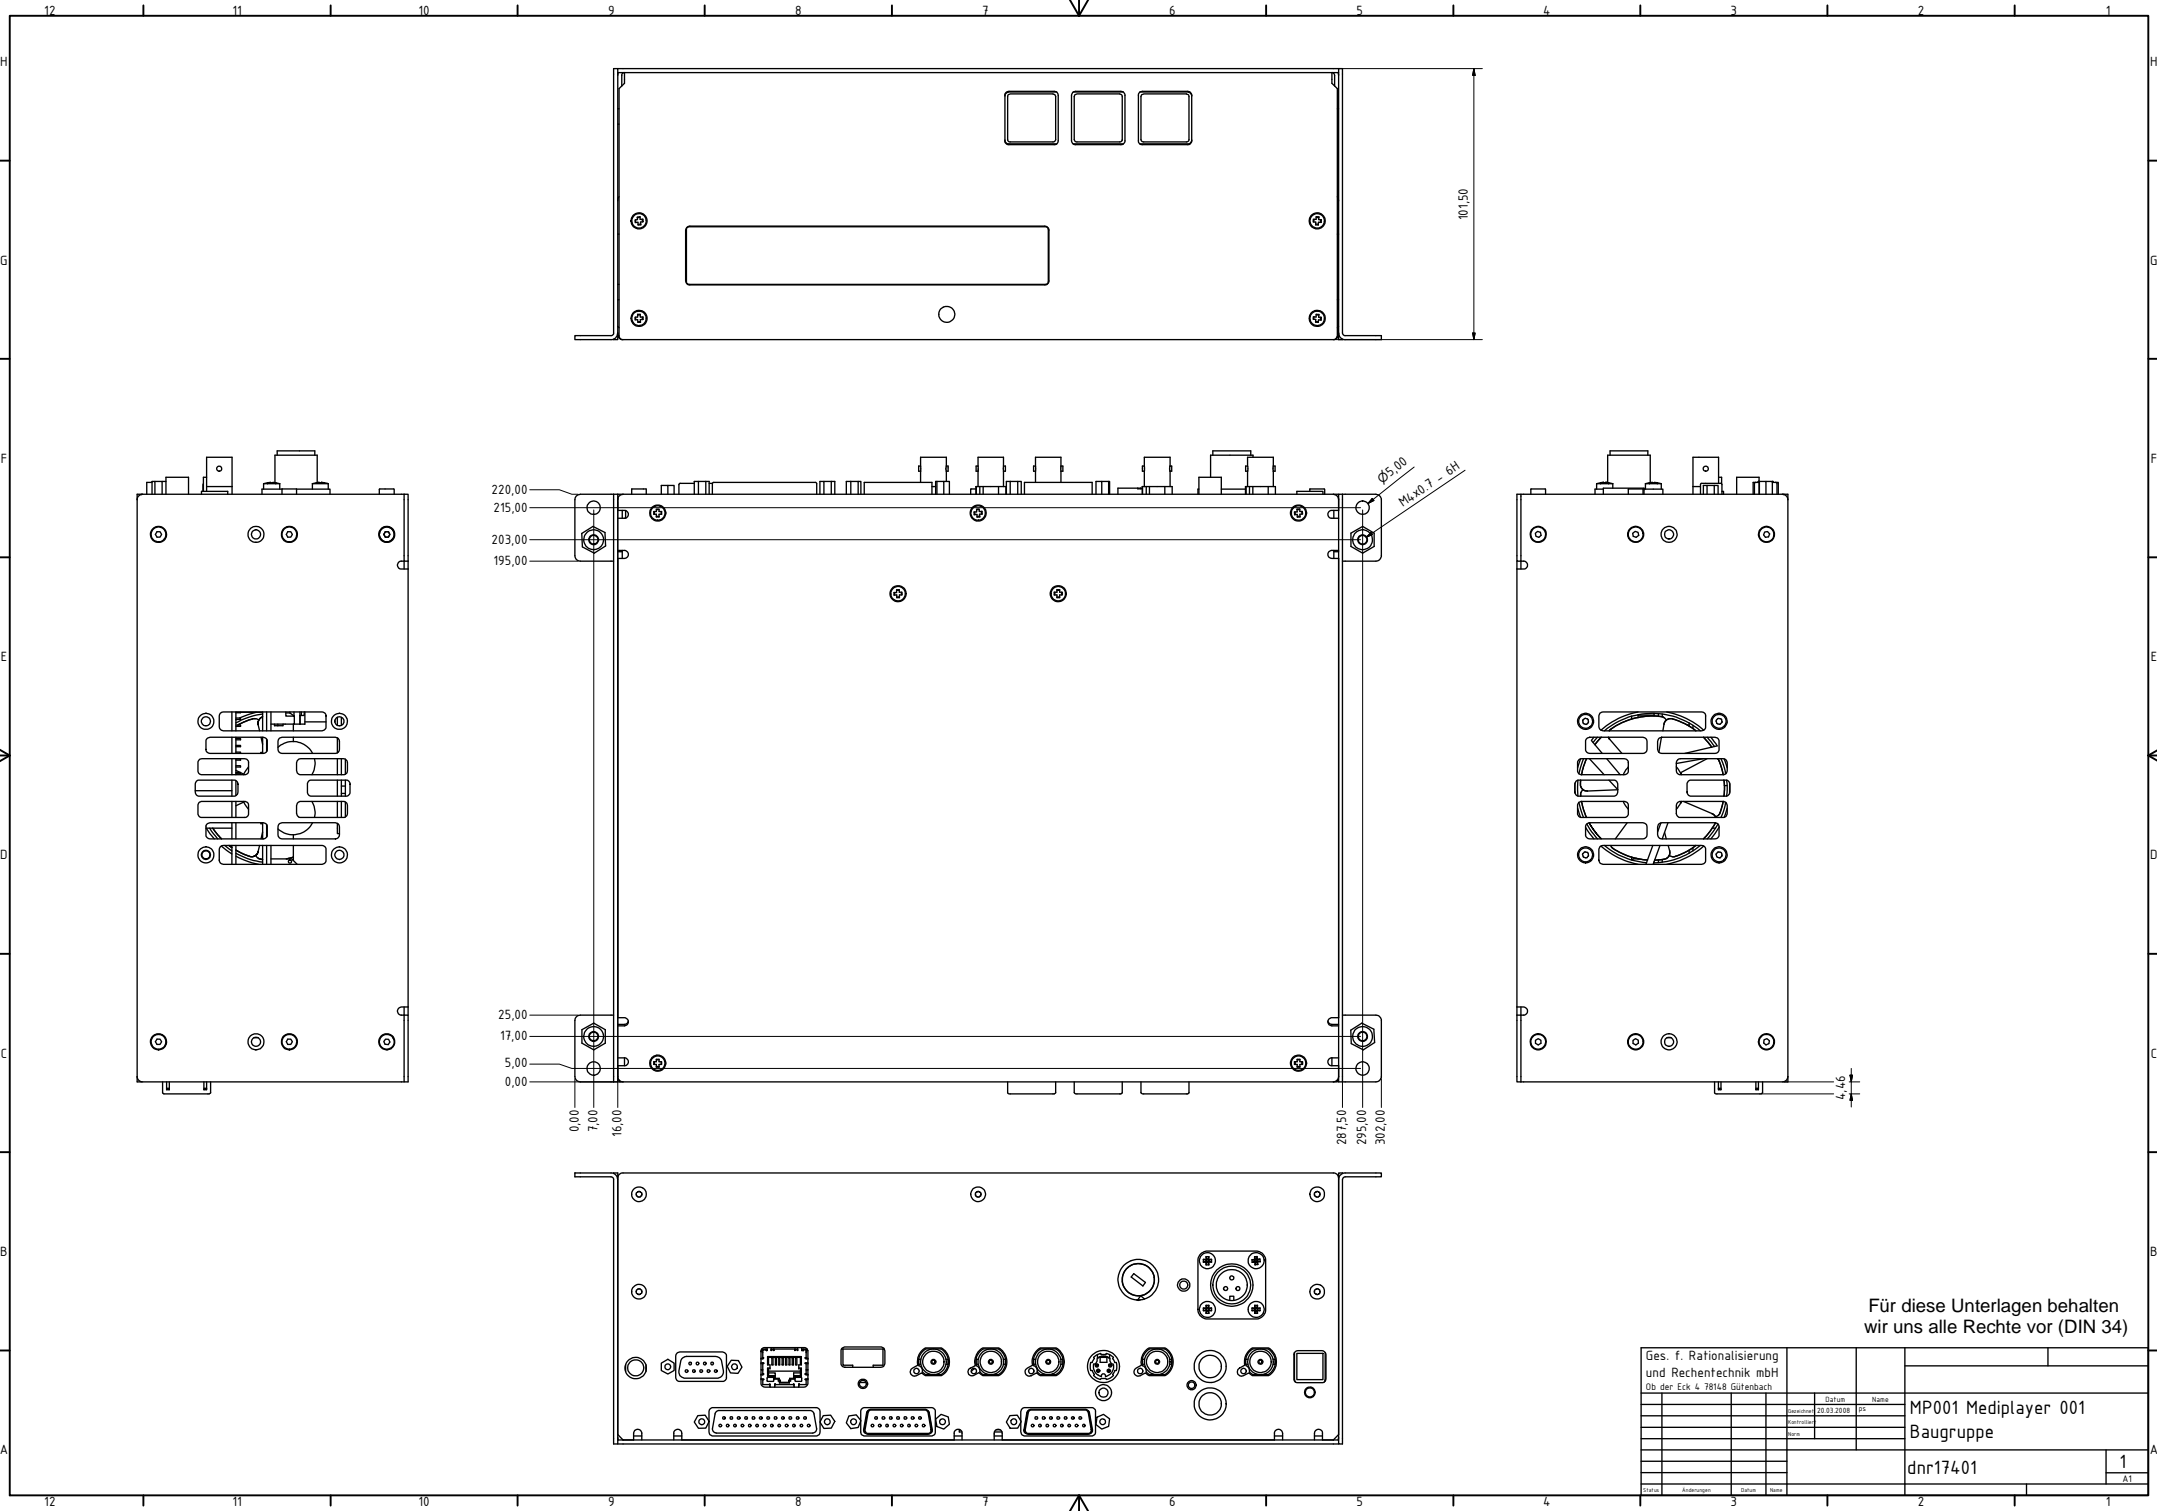

Für diese Unterlagen behalten wir uns alle Rechte vor (DIN 34)

Ges. f. Rationalisierung und Rechartechnik mbH Ob der Eck 4 78148 Gürenbach		Datum 20.03.2008		Name SP	
		Rechnung		MP001 Mediaplayer 001	
		Stanz		Baugruppe	
				dnr17401	
				1	
				A1	