



R&R industrial keyboard IKV6W95ET-01 for tough environment high quality keyboard


Front panel	542 x 200 x 3.2 mm Aluminum anodized or stainless steel option: customized front panel size
W x H x D drawing	542 x 200 x 30mm See DNR 20151
cutout	512 x 170mm
Housing	Aluminium anodized Option, back side with protective hood
keyboard	full layout 118 R&R metal keys type V6 sealed contact sealed guide elements
switch	additional mechanical stop for good resistance to impact longlife silicon rubber key with good tactile feedback lifetime > 2 Million switch cycles Actuation force 1N or 2N travel 1.5mm
V6 label	stainless steel or aluminum anodized: black, red colourless, blue, green
Inscription	engraved

IKV6W95ET-01

Ob der Eck 4· D-78148 Gütenbach · Telefon (07723) 9186-0 · Telefax (07723)9186-30

[DNR20041_E.DOC REV.01 10.01.2012](#)

WWW.RURGMBH.DE INFO@RURGMBH.DE

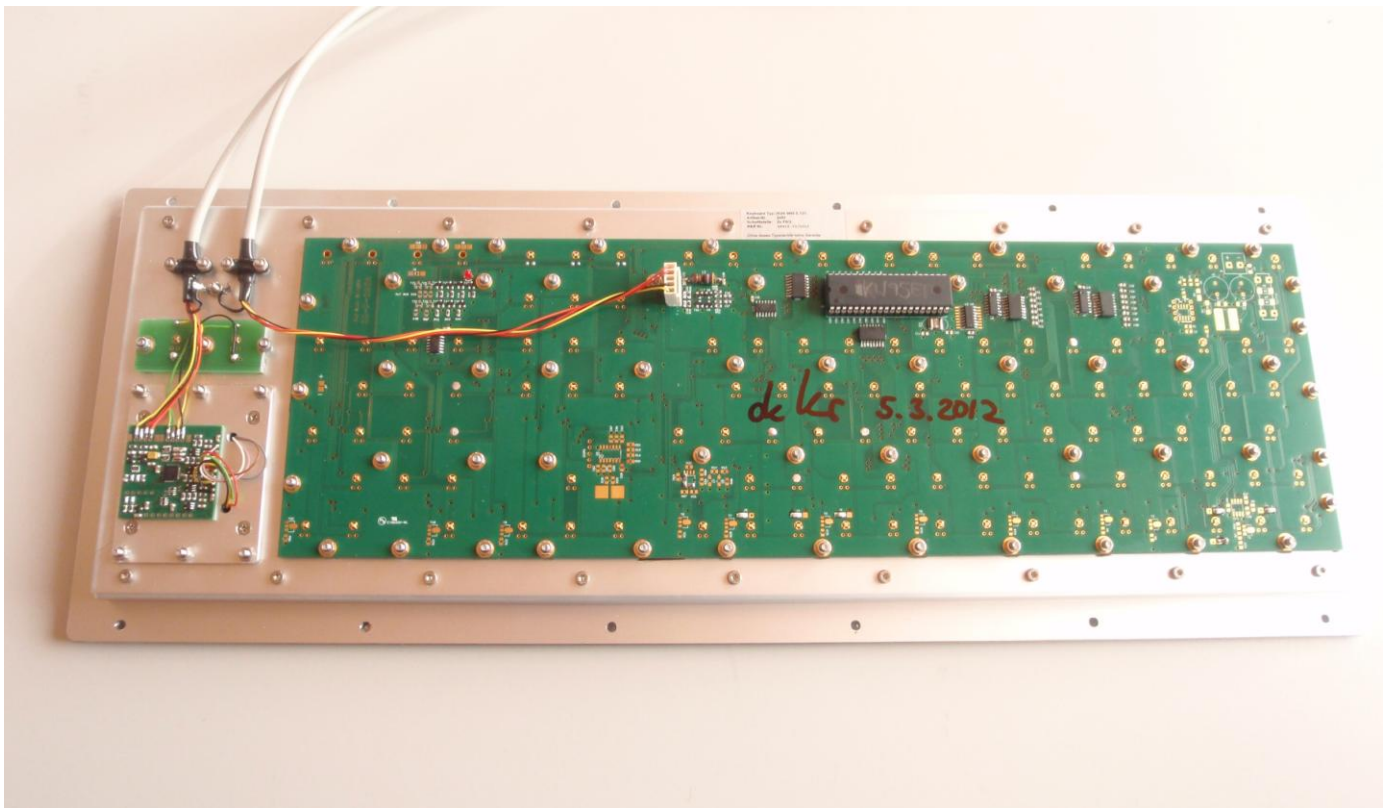

interface

PS2 3 m cable + PS2 to USB converter


IKV6W95ET-01

Ob der Eck 4 · D-78148 Gütenbach · Telefon (07723) 9186-0 · Telefax (07723)9186-30

[DNR20041_E.DOC REV.01 10.01.2012](#)

WWW.RURGMBH.DE INFO@RURGMBH.DE

Trackball TR127 30mm ball
black resin or stainless steel
operational on any angle,
smooth running

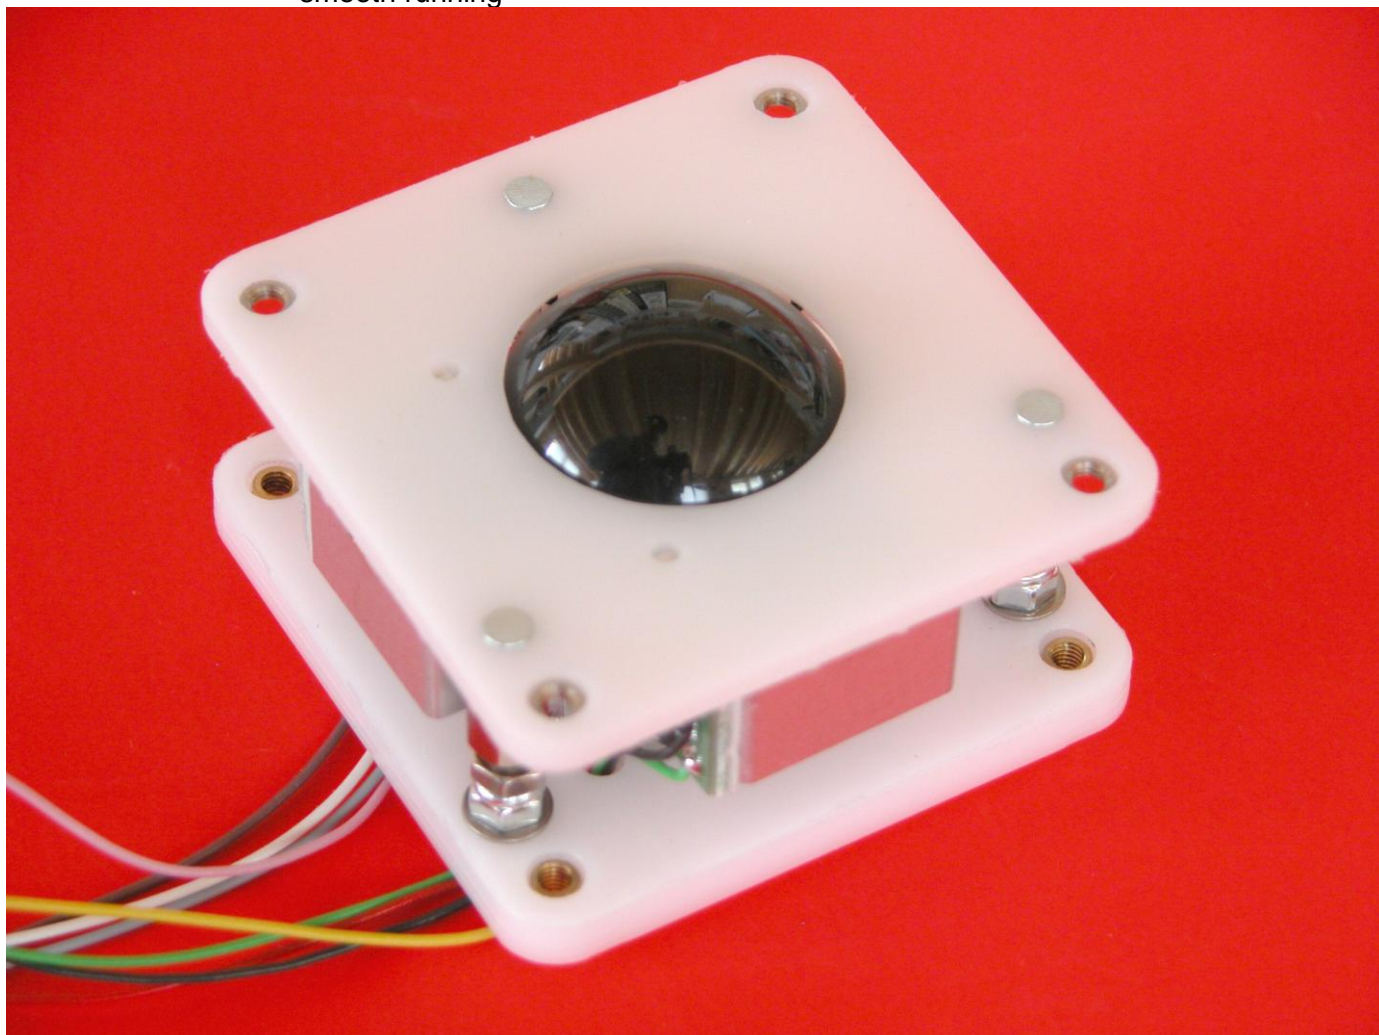

Interface	PS2, Mini-DIN-06
Cable length	3m
Protection class	IP 65 dustproof, waterproof
Operating temperature	-25°C up to +60°C
weight	3,2kg

IKV6W95ET-01

Ob der Eck 4 · D-78148 Gütenbach · Telefon (07723) 9186-0 · Telefax (07723)9186-30

[DNR20041_E.DOC REV.01 10.01.2012](#)

WWW.RURGMBH.DE INFO@RURGMBH.DE